



DOSATRON®

WATER POWERED DOSING TECHNOLOGY

100 GPM: D20S


Product Specifications

Call 800-523-8499 to order the Dosatron for your specific application

Dilution Range:	1:500 to 1:50 (.2% to 2%)
Water Flow Range:	5 to 100 GPM
Operating Pressure Range:	2 to 120 PSI
Available Housing Materials:	Aluminum (Standard Blue)
Seal Materials:	Viton/Kalrez for PAA
Dimensions:	55" x 15" (with legs); 42" x 15" (no legs)
Weight:	47 lbs
Connection Size:	2" NPT
Maximum Temperature:	104° F
Included Accessories:	Set of legs, manual bypass, 6 ft clear suction tube, strainer, vacuum breaker and operating manual
Recommended Accessories:	200 mesh filter, check valve.



Basic Installation

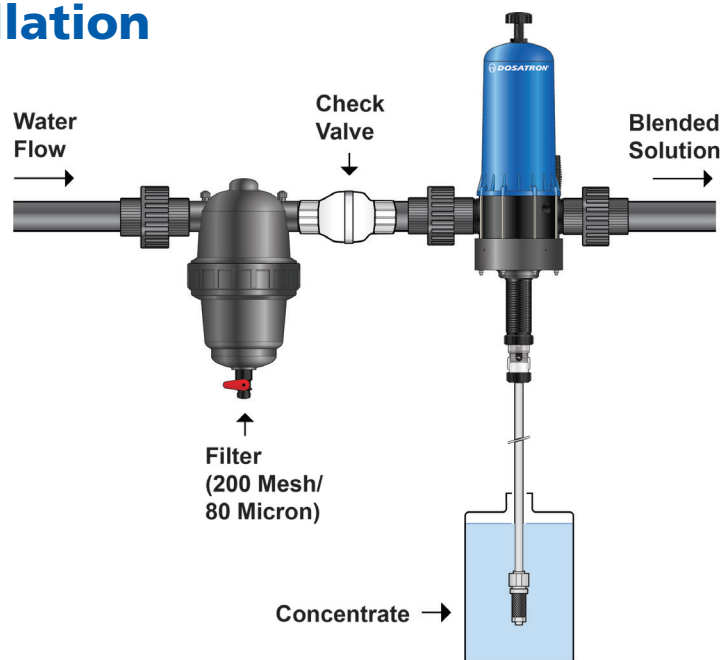

Dosatron International

2090 Sunnydale Blvd. • Clearwater, FL, USA

800-523-8499 (solo en USA) • 727-443-5404 • www.dosatronusa.com

Dosatron International, Inc. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards.